


# *CXII*

TWO




***FW3400 CXII/B • FW3410 CXII/B***  
***LONG DWELL SEALING***

**Features**

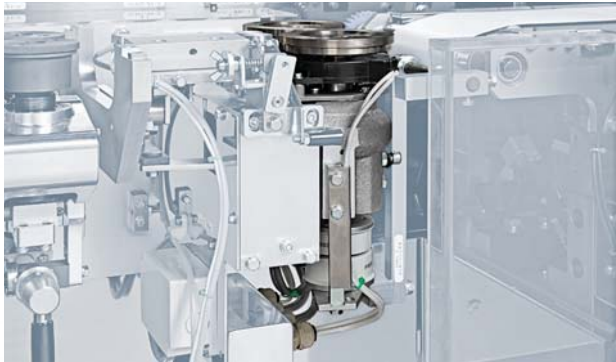

- ▶ **ENERGY SAVING - INDUCTION HEATING**  
Energy saving technology, maintenance-free design, faster temperature control and accuracy.

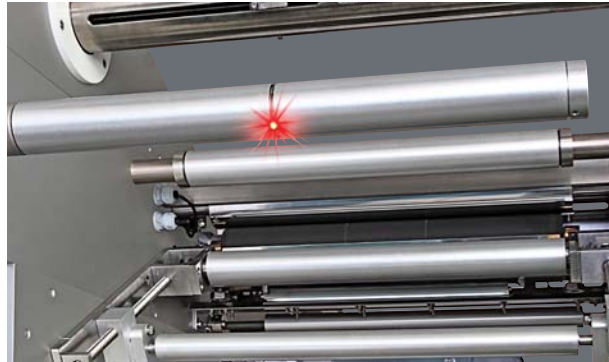

- ▶ **NON - CONTACT SENSOR**  
New type of sensor to detect finish of film rolls.


**Specifications**

Machine type	FW3400 CXII /B	FW3410 CXII /B
Capacity	Up to 180 packs/min	Up to 140 packs/min
Cut length	Up to 340mm	Up to 430mm
	(Up to 3,999 mm according to the spec.)	
Product size to be wrapped	Width: Up to 140mm	Width:Up to 200mm
	Height:Up to 80mm	Height:Up to 100mm
Wrapping film	Width: Up to 430mm	Width: Up to 600mm
	Outside diameter: Up to 300mm	

\*Specifications may vary according to application, and the right is reserved to make changes without notice.




- ▶ **UNIVERSAL DESIGN INTERFACE**  
Operator interface with the machine is simple and straightforward. This model is designed for concept of “anyone will find easy to use”.

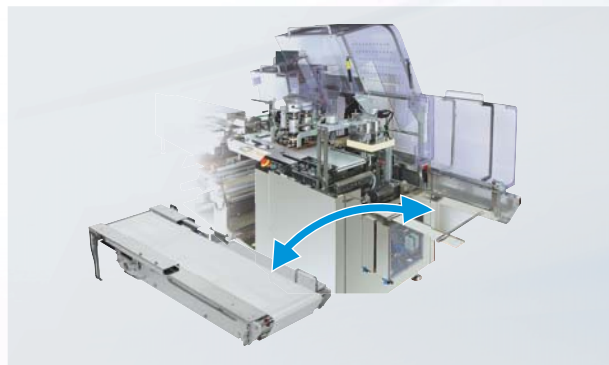

- ▶ **EASY MAINTENANCE**  
Easy removable discharge conveyor saves your maintenance time.

**Dimensions**

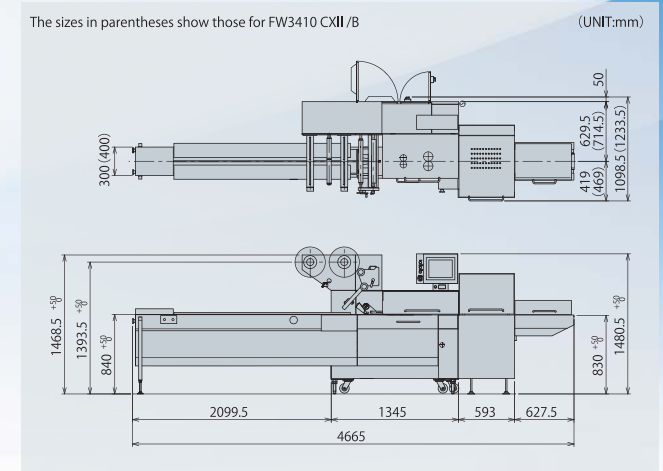

# *CXII*

TWO




***FW3400 CXII • FW3410 CXII***

## Features



### ▶ ENERGY SAVING - INDUCTION HEATING

Energy saving technology, maintenance-free design, faster temperature control and accuracy.

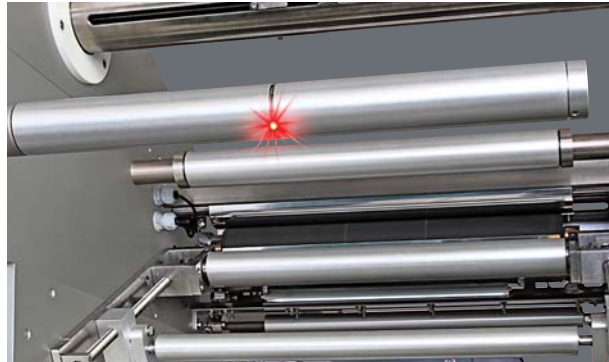


### ▶ NON - CONTACT SENSOR

New type of sensor to detect finish of film rolls.



### ▶ UNIVERSAL DESIGN INTERFACE

Operator interface with the machine is simple and straightforward. This model is designed for concept of “anyone will find easy to use”.

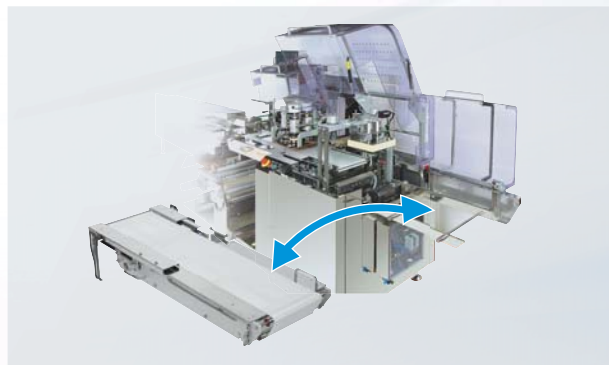

### ▶ EASY MAINTENANCE

Easy removable discharge conveyor saves your maintenance time.

## Specifications

Machine type	FW3400 CXII	FW3410 CXII
Capacity	Up to 300 packs/min	Up to 300 packs/min
Cut length	Up to 350mm	Up to 450mm
	(Up to 3,999 mm according to the spec.)	
Product size to be wrapped	Width: Up to 140mm	Width: Up to 200mm
	Height: Up to 60mm	Height: Up to 100mm
Wrapping film	Width: Up to 430mm	Width: Up to 600mm
	Outside diameter: Up to 300mm	

\*Specifications may vary according to application, and the right is reserved to make changes without notice.

## Dimensions

